



CALCULATION OF EMISSIONS FROM A NITROUS OXIDE PLANT

SAC Doc 191/14

EUROPEAN INDUSTRIAL GASES ASSOCIATION AISBL



AVENUE DES ARTS 3-5 • B-1210 BRUSSELS
Tel: +32 2 217 70 98 • Fax: +32 2 219 85 14
E-mail: info@eiga.eu • Internet: www.eiga.eu



CALCULATION OF EMISSIONS FROM A NITROUS OXIDE PLANT

PREPARED BY :

Marco Arrighi	Sapio Produzione Idrogeno Ossigeno
Philippe Beraud	Air Liquide
Stephen Bradley	Air Products
Phillip Brickell	EIGA
Lilijana Ruedl Simič	Messer Slovenija
Per Øystein Storlien	Yara Praxair
Chris Szweda	The Linde Group

Disclaimer

All technical publications of EIGA or under EIGA's name, including Codes of practice, Safety procedures and any other technical information contained in such publications were obtained from sources believed to be reliable and are based on technical information and experience currently available from members of EIGA and others at the date of their issuance.

While EIGA recommends reference to or use of its publications by its members, such reference to or use of EIGA's publications by its members or third parties are purely voluntary and not binding.

Therefore, EIGA or its members make no guarantee of the results and assume no liability or responsibility in connection with the reference to or use of information or suggestions contained in EIGA's publications.

EIGA has no control whatsoever as regards, performance or non performance, misinterpretation, proper or improper use of any information or suggestions contained in EIGA's publications by any person or entity (including EIGA members) and EIGA expressly disclaims any liability in connection thereto.

EIGA's publications are subject to periodic review and users are cautioned to obtain the latest edition.



Table of Contents

1	Introduction	1
2	Scope and Purpose	1
2.1	Scope.....	1
2.2	Purpose	1
3	Definitions	1
3.1	Publication terminology	1
3.1.1	Shall.....	1
3.1.2	Should	1
3.1.3	May.....	1
3.1.4	Can	2
4	Nitrous oxide emissions from a nitrous oxide plant	2
4.1	Chemical reactions	2
4.2	Sources of emissions.....	2
4.2.1	Purification process (to remove nitrogen)	2
4.2.2	Transfer of the end product into storage	5
4.2.3	Trucks trailer filling	5
4.2.4	Inspection of trailers	5
4.2.5	Safety tests and maintenance	5
4.3	Minimisation of nitrous oxide emissions	5
4.3.1	Reduction at the source	5
5	References.....	6

1 Introduction

This document provides details on nitrous oxide emissions from a nitrous oxide plant. The user may adapt this information with their information specific to their own plant and obtain an estimate of the emissions to air.

The basic philosophy behind the document is the minimisation of emissions, nuisance and wastes of any kind and their disposal as it is stated in ISO 14001¹. *Environmental management systems -- Requirements with guidance for use* [1]

"Organizations of all kinds are increasingly concerned to achieve and demonstrate sound environmental performance by controlling the impacts of their activities, products or services on the environment, taking into account their environmental policy and objectives."

Additionally, nitrous oxide is considered a greenhouse gas (GHG) with a Global Warming Potential (GWP) (100 years) expressed in CO₂ equivalent of 298 (4th IPCC report 2007 [2]). It is one of the six gases included in the scope of the Kyoto Protocol.

2 Scope and Purpose

2.1 Scope

This document considers the potential environmental impact of air emissions from nitrous oxide plants. It deals only with nitrous oxide emissions to air because of its high Global Warming Potential (CO₂ equivalent of 298).

The influence of the European Pharmacopoeia rules for medicinal nitrous oxide is also taken into account where relevant.

Further details of best practices and other environmental impacts can be found in the documents

- EIGA Doc.112 *Environmental impact of nitrous oxide production* [3].
- EIGA Doc.175, *Safe practices for the production of nitrous oxide from ammonium nitrate* [4]
- EIGA Doc.176, *Safe practices for storage and handling of nitrous oxide* [5]

2.2 Purpose

This document provides guidance on the estimation of nitrous oxide losses as emissions from nitrous oxide plants, based on the most common process features.

A better understanding of the origin of the nitrous oxide emissions or losses allows improvements in productivity and savings in production costs, and helps the estimate of the quantities of nitrous oxide to be as accurate as possible.

3 Definitions

3.1 Publication terminology

3.1.1 Shall

Indicates that the procedure is mandatory; it is used wherever the criterion for conformance to specific recommendations allows no deviation.

3.1.2 Should

Indicates that a procedure is recommended

3.1.3 May

Indicates that the procedure is optional

¹ References are shown in bracketed numbers and are listed in order of appearance in the reference section


3.1.4 Can

Indicates a possibility or ability



4 Nitrous oxide emissions from a nitrous oxide plant

4.1 Chemical reactions

Nitrous oxide is produced by thermal decomposition of ammonium nitrate at a temperature of approximately 250°C:



Side reactions can occur and can lead to production of ammonia (NH₃) and decomposition reactions producing N₂ and O₂:



These side reactions have to be taken into account when calculating the theoretical yield of the reaction and the associated theoretical nitrous oxide losses. This accounts for a maximum loss of 5% of ammonium nitrate, expressed as dry matter. Typical consumption of ammonium nitrate is between 1.8 to 2 kg of ammonium nitrate per kg nitrous oxide

4.2 Sources of emissions

Typical nitrous oxide emission sources from a nitrous oxide plant are:

- Purification process (to remove nitrogen);
- Transfer of the end product into storage;
- Filling of trucks or trailers;
- Inspection of the trailers; and
- Safety tests and maintenance.

The amount of gas which is emitted depends additionally on various parameters of the production process. The following sections give an explanation of how to estimate gaseous emissions releases during normal operation.

4.2.1 Purification process (to remove nitrogen)

Nitrous oxide losses from the purification process step depend on the actual process that is used. Each process will have different nitrous oxide vents that should be taken into account when estimating the nitrous oxide losses and emissions.

The following three main unit processes are considered:

- Pressure swing absorption;
- Column distillation; and
- Cryogenic heat exchange.

4.2.1.1 Pressure swing absorption

A simplified drawing of the purification process by pressure swing absorption is shown in Figure 1.

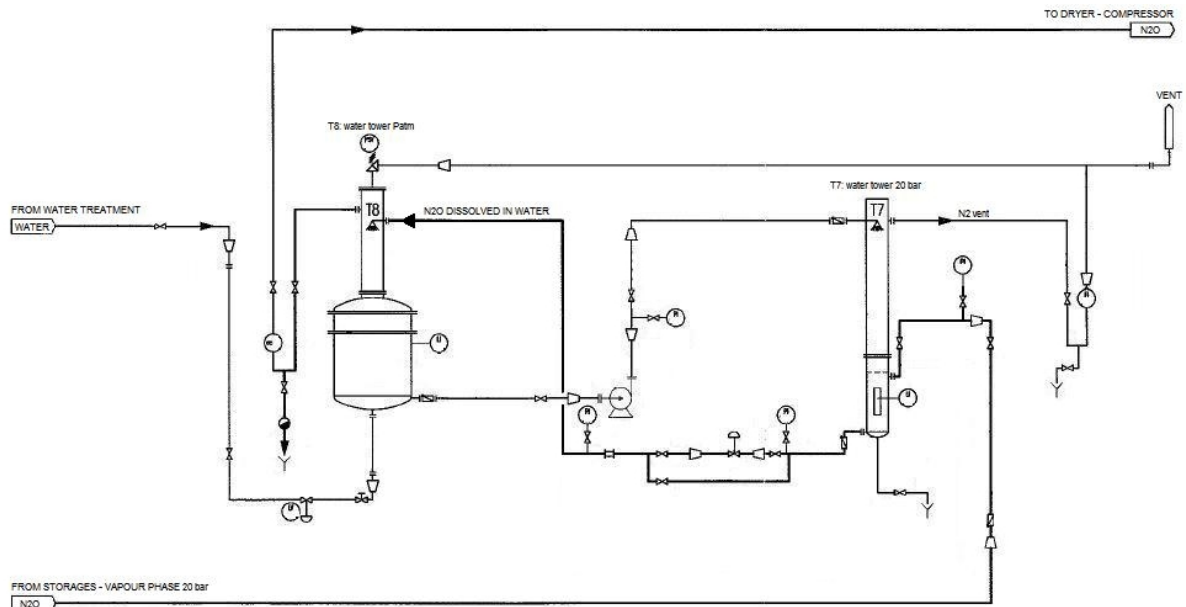


Figure 1: Purification through pressure swing absorption

This process relies on the solubility difference of nitrous oxide and nitrogen in water at different pressures. At the end of the production process, nitrous oxide is dissolved in water at high pressure (20 bars). Next, the nitrous oxide dissolved in the water is sprayed into a second column maintained at atmospheric pressure.

The vent from this second water tower is enriched in nitrogen and is vented to the atmosphere. It still contains around 80% nitrous oxide. Additional nitrous oxide treatment devices may be used to abate the nitrous oxide content of this vent stream.

4.2.1.2 Column distillation

A simplified drawing of the purification process using a distillation column is shown in Figure 2.

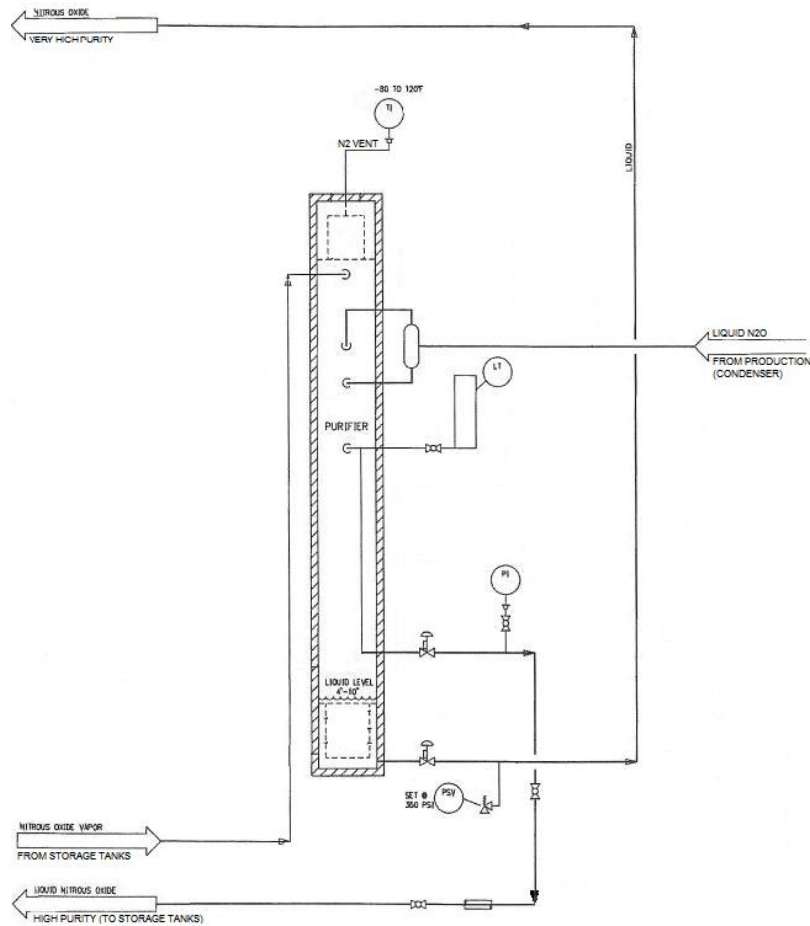


Figure 2: purification process using a distillation column

The principle of this purification process is cryogenic distillation of the nitrous oxide / nitrogen “mixture” from the production step. Different levels of purity for the final nitrous oxide product can be obtained depending on the height of the extraction point in the distillation column.

The vent at the top of the column contains approximately 30% nitrous oxide.

4.2.1.3 Cryogenic heat exchange

A simplified drawing of the purification process using a cryogenic heat exchanger is shown in Figure 3.

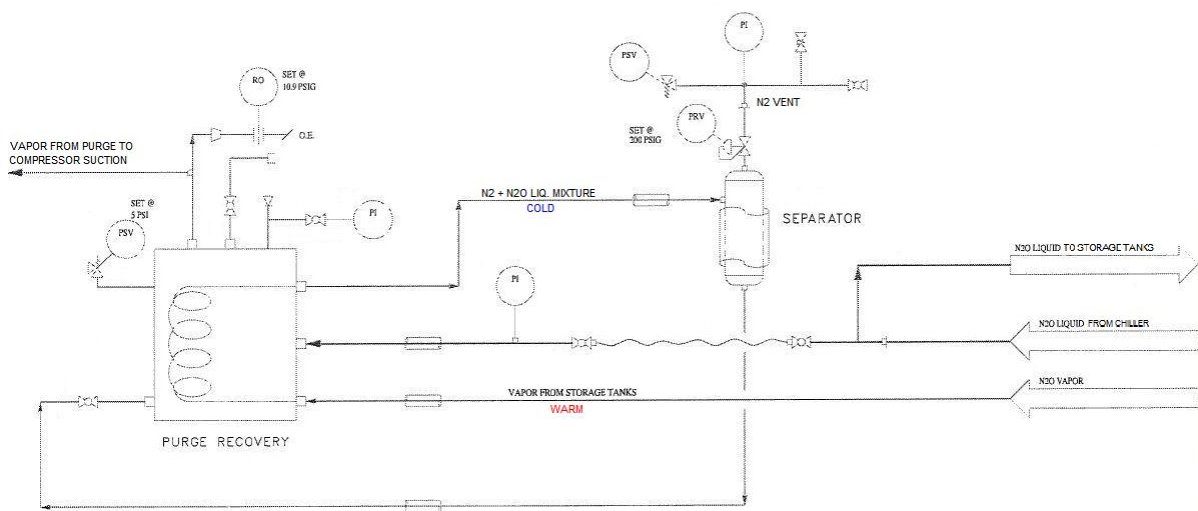


Figure 3: purification process using a cryogenic heat exchanger

The N₂ to be purified flows in a coil which is submerged into a liquid nitrogen cryogenic bath. Due to the temperature, a two phase liquid mixture is created: the gaseous nitrogen is purged and the purified nitrous oxide is introduced in the liquid bath. Purified nitrous oxide vapour is led to the compressor suction. The vent at the top of the separator contains less than 20% nitrous oxide.

4.2.2 Transfer of the end product into storage

During the transfer of the end product into cryogenic storage, the gaseous phase of medical grade storage is recycled into the production loop (just before the compressor). Depending on how European Pharmacopoeia rules are nationally implemented, the gaseous phase of industrial grade storage may not be recovered in the process (even at the purification step), to prevent back contamination. This may lead to nitrous oxide emission to the atmosphere. This may be limited by installing flow restriction devices on the storage to limit the flow rate of the venting.

If an intermediate liquid storage is used, between the end of the production process and the final product storage (in order to define a batch number before release of the product by a qualified person), more losses may be expected at this point due to liquid transfer (1 liquid litre expands into 662 gaseous litres).

4.2.3 Trucks trailer filling

When filling the trailers, approximately 20 minutes before the end of the filling, an overflow gauge is opened to prevent overfilling. Attention shall be paid to the setting and the use of the possible overflow devices.

The filling of the trailers or cylinders with industrial grade nitrous oxide sometimes involves venting nitrous oxide to the atmosphere in order to prevent the mixing of medicinal and industrial grade products. Before filling attention shall be paid to whether there is still some liquid in the storage to prevent the material of the trailer cooling down too quickly.

4.2.4 Inspection of trailers

Trailers follow a periodic inspection of all their safety devices and to check the integrity of their loading / unloading equipment. Before this inspection, the nitrous oxide content has to be purged into nitrogen service and after the inspection the container has to be purged back into nitrous oxide service before the first filling to ensure compliance with quality specifications. Both of these processes can result in nitrous oxide emissions.

4.2.5 Safety tests and maintenance

Plant maintenance, safety equipment and quality tests have to be performed during the year. These can lead to nitrous oxide emissions and losses through venting. These emission losses can arise from periodic rinsing of the reactors, sampling for quality analysis and rinsing of the sampling cylinder, the change out of a leaking valve on cryogenic liquid storage, losses from hoses when connecting / disconnecting.

4.3 Minimisation of nitrous oxide emissions

The best available techniques for minimisation of nitrous oxide emissions include reduction at source. If this is not feasible then residual gases shall be vented and disposed of according to legislation or by referring to EIGA Doc.30 *Disposal of Gases* [6].

4.3.1 Reduction at the source

As far as nitrous oxide is concerned, reduction at the source by recycling of the emissions is the best way to decrease or to abate the emissions. This option requires the least investment in "abatement" equipment.

Therefore, once nitrous oxide emissions have been collected, any possibility of recycling them into the nitrous oxide production process has to be investigated. This recycling may be restricted and regulated by the Pharmacopoeia authorities and each country has a different situation.

When recycling is possible, it is recommended to route the collected nitrous oxide emissions to the suction of the compressor if the pressure level is compatible. Of course, it is much better to directly recover the collected nitrous oxide emissions in the end product conditioning step but this might not be possible due to purity requirements.

5 References

- [1] ISO 14001:2004, *Environmental management systems -- Requirements with guidance for use*. International Standards Organisation. www.iso.org
- [2] IPCC *Fourth Assessment Report: Climate Change 2007, Intergovernmental Panel on Climate Change*. www.ipcc.ch
- [3] EIGA Doc.112, *Environmental impact of nitrous oxide production*. www.eiga.eu
- [4] EIGA Doc.175, *Safe practices for the production of nitrous oxide from ammonium nitrate*. www.eiga.eu
- [5] EIGA Doc.176, *Safe practices for storage and handling of nitrous oxide*. www.eiga.eu
- [6] EIGA Doc.30, *Disposal of gases*. www.eiga.eu